



10/100M adaptive fast Ethernet optical media converter is a new product used for optical transmission via high-speed Ethernet. It is capable of switching between twisted pair and optical and relaying across 10/100 Base-TX and 100 Base-Fx network segments, meeting long-distance, high-speed and high-broadband fast Ethernet workgroup users' needs, achieving high-speed remote interconnection for up to 120 km's relay-free computer data network. With steady and reliable performance, design in accordance with Ethernet standard and lightning protection, it is particularly applicable to a wide range of fields requiring a variety of broadband data network and high-reliability data transmission or dedicated IP data transfer network, such as telecommunication, cable television, railway, military, finance and securities, customs, civil aviation, shipping, power, water conservancy and oilfield etc, and is an ideal type of facility to build broadband campus network, cable TV and intelligent broadband FTTB/FTTH networks.

1. Overview

2.1 Features

- In accordance with Ethernet standards IEEE802.3, 10/100Base-TX and 100Base-FX
- Supported Ports: SC for optical fiber; RJ45 for twisted pair
- Auto-adaptation rate and full/half-duplex mode supported at twisted pair

port

- Auto MDI/MDIX supported without need of cable selection
- Up to 6 LEDs for status indication of optical power port and UTP port
- External and built-in DC power supplies provided
- 128 K's data buffer RAM
- Support for low-delay time pure data transmission and full/half-duplex flow control.
- Built-in watch-dog timer to monitor any error in internal data exchange

2.2 Technical Parameters

| Technical Parameters for 10/100M Adaptive Fast Ethernet Optical Media Converter | |
|---|---|
| Number of Network Ports | 1 channel |
| Number of Optical Ports | 1 channel |
| NIC Transmission Rate | 10/100 Mbit/s |
| NIC Transmission Mode | 10/100M adaptive with support for automatic inversion of MDI/MDIX |
| Optical Port Transmission Rate | 100Mbit/s |
| Operating Voltage | AC 220V or DC +5V |
| Overall Power | <1W |
| Network Ports | RJ45 port |
| Optical Specifications | Optical Port: SC, ST or FC (Optional) Multi-Mode: 50/125, 62.5/125um Single-Mode: 8.3/125, 8.7/125um, 8/125, 10/125um Wavelength: Single-Mode: 1310/1550nm |
| Data Channel | IEEE802.3x and collision base back pressure supported Working Mode: Full/half duplex supported Transmission Rate: 100Mbit/s with error rate of zero |
| Some Product Modes and port Technical Parameters of Optical Port | |
| Desk Type Dual-Optical Single-Mode/Multi-Mode Media Converter | |



10&100M Media Converter

| Product Mode | Wave length (nm) | Optical Port | Electric Port | Optical Power (dBm) | Receiving Sensitivity (dBm) | Transmission Range (km) |
|---|------------------|--------------|---------------|---------------------|-----------------------------|-------------------------|
| SO2MA-05V-8S | 850 | SC | RJ-45 | -8~ -3 | ≤-19 | 0.55 |
| SO2SA-2F-3S | 1,310 | SC | RJ-45 | -20~ -15 | ≤-34 | 2 |
| SO2SA-10F-5S | 1,550 | SC | RJ-45 | -15~ -8 | ≤-34 | 10 |
| SO2SA-20F-3S | 1,310 | SC | RJ-45 | -15~ -3 | ≤-34 | 20 |
| SO2SA-40F-3S | 1,310 | SC | RJ-45 | -8~ -3 | ≤-34 | 40 |
| SO2SA-60F-3S | 1,310 | SC | RJ-45 | -5~0 | ≤-34 | 60 |
| SO2SA-80D-5S | 1,550 | SC | RJ-45 | -5~0 | ≤-34 | 80 |
| SO2SA-100D-5S | 1,550 | SC | RJ-45 | 0~5 | ≤-36 | 100 |
| SO2SA-120D-5S | 1,550 | SC | RJ-45 | 0~5 | ≤-36 | 120 |
| Desk Type Single-Optical Two-Way Media Converter | | | | | | |
| Product Mode | Wave length (nm) | Optical Port | Electric Port | Optical Power (dBm) | Receiving Sensitivity (dBm) | Transmission Range (km) |
| SO2MB-2F-3S | 1,310 | SC | RJ-45 | -20~ -15 | ≤-34 | 2 |
| SO2MB-2F-5S | 1,550 | SC | RJ-45 | -20~ -15 | ≤-34 | 2 |
| SO2SB-10F-3S | 1,310 | SC | RJ-45 | -15~ -8 | ≤-34 | 10 |
| SO2SB-10F-5S | 1,550 | SC | RJ-45 | -15~ -8 | ≤-34 | 10 |
| SO20SB-20F-3S | 1,310 | SC | RJ-45 | -15~ -3 | ≤-34 | 20 |
| SO20SB-20F-5S | 1,550 | SC | RJ-45 | -15~ -3 | ≤-34 | 20 |
| SO2SB-40F-3S | 1,310 | SC | RJ-45 | -8~ -3 | ≤-34 | 40 |
| SO2SB-40F-5S | 1,550 | SC | RJ-45 | -8~ -3 | ≤-34 | 40 |
| SO2SB-60F-3S | 1,310 | SC | RJ-45 | -5~0 | ≤-34 | 60 |
| SO2SB-60D-5S | 1,550 | SC | RJ-45 | -5~0 | ≤-34 | 60 |
| SO2SB-80D-3S | 1,310 | SC | RJ-45 | 0~5 | ≤-34 | 80 |
| SO2SB-80D-5S | 1,550 | SC | RJ-45 | -5~0 | ≤-34 | 80 |
| SO2SB-100D-5S | 1,550 | SC | RJ-45 | -3~3 | ≤-36 | 100 |
| SO2SB-100D-4S | 1,490 | SC | RJ-45 | -3~3 | ≤-36 | 100 |
| SO2SB-120D-4S | 1490 | SC | RJ-45 | 0~5 | ≤-36 | 120 |
| SO2SB-120D-5S | 1,550 | SC | RJ-45 | 0~5 | ≤-36 | 120 |

3. Operating Environment

3.1 Operating Voltage

AC 220V/ DC +5V

3.2 Operating Humidity

Operating Temperature: 0°C to +50°C

Storage Temperature: -20°C to +70°C

Humidity: 5% to 90%

4. Quality Assurance

MTBF > 100,000 hours;

Replacement within one year and non-charge repair within three years guaranteed

5. Application

5.1 Application Fields

- For intranet prepared for expansion from 10M to 100M
- For integrated data network for multimedia such as image, voice and etc.
- For point-to-point computer data transmission
- For computer data transmission network in a wide range of business application
- For broadband campus network, cable TV and intelligent FTTB/FTTH data tape
- In combination with switchboard or other computer network facilitates for: chain-type, star-type and ring-type network and other computer networks

5.2 Application Industries

Intelligent transport monitoring system, safety and security monitoring system, campus network, industrial monitoring (electric power, chemical industry, steel, oil, railway and water conservancy etc.); military monitoring (warehouse, guard and confidentiality etc.) TV program transfer system;

6. Remarks and Notes

6.1 Instructions on Media Converter Panel

Instructions on Front Panel

Identification for front panel of the transceiver is shown below:

a. Identification of Media Converter

TX - transmitting terminal; RX - receiving terminal;

b. PWR

Power Indicator Light – “ON” means normal operation of DC 5V power supply adaptor.

c. 100M Indicator Light

“ON” means the rate of the electric port is 100 Mbps, while “OFF” means the rate is 10 Mbps.

d. LINK/ACT (FP)

“ON” means connectivity of the optical channel; “FLASH” means data transfer in the channel; “OFF” means non-connectivity of the optical channel.

e. LINK/ACT (TP)

“ON” means connectivity of the electric circuit; “FLASH” means data transfer in the circuit; “OFF” means non-connectivity of the electric circuit.

f. SD Indicator Light

“ON” means input of optical signal; “OFF” means non input.

g. FDX/COL:

“ON” means full duplex electric port; “OFF” means half-duplex electric port.

h. UTP


Non-shielded twisted pair port;

Instructions on Rear Panel


There is only a DC 5V external power port on the rear panel:



6.2. Mounting Dimensions Sketch

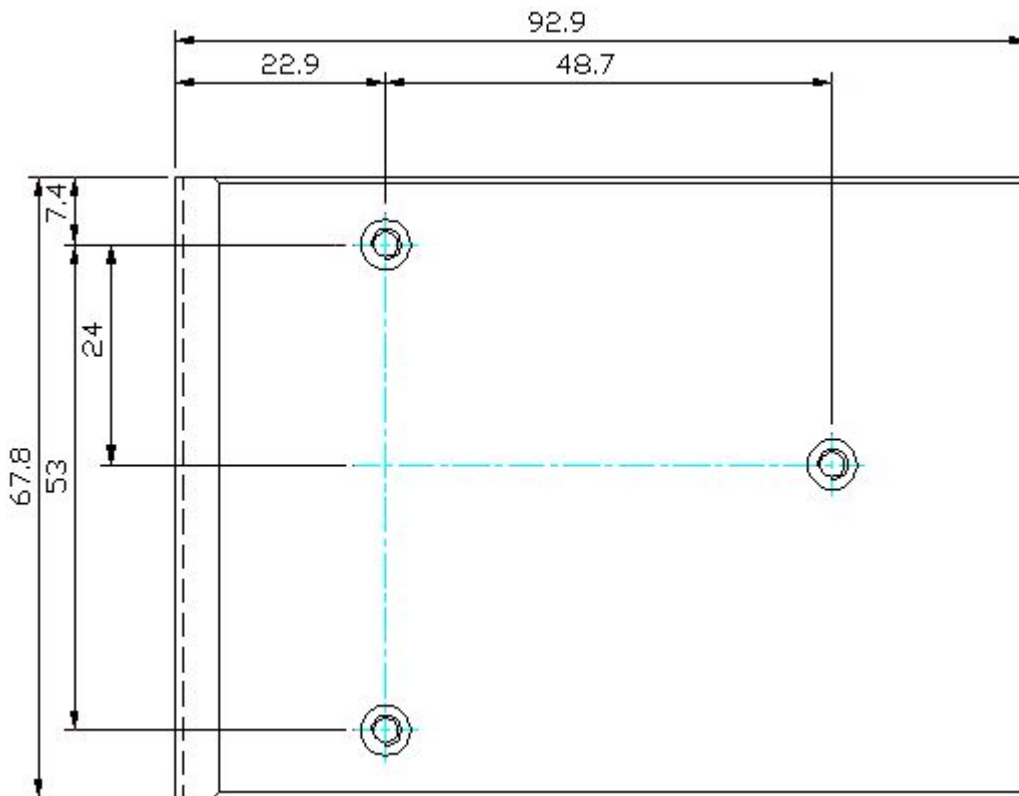

6.3. Connection Sketch

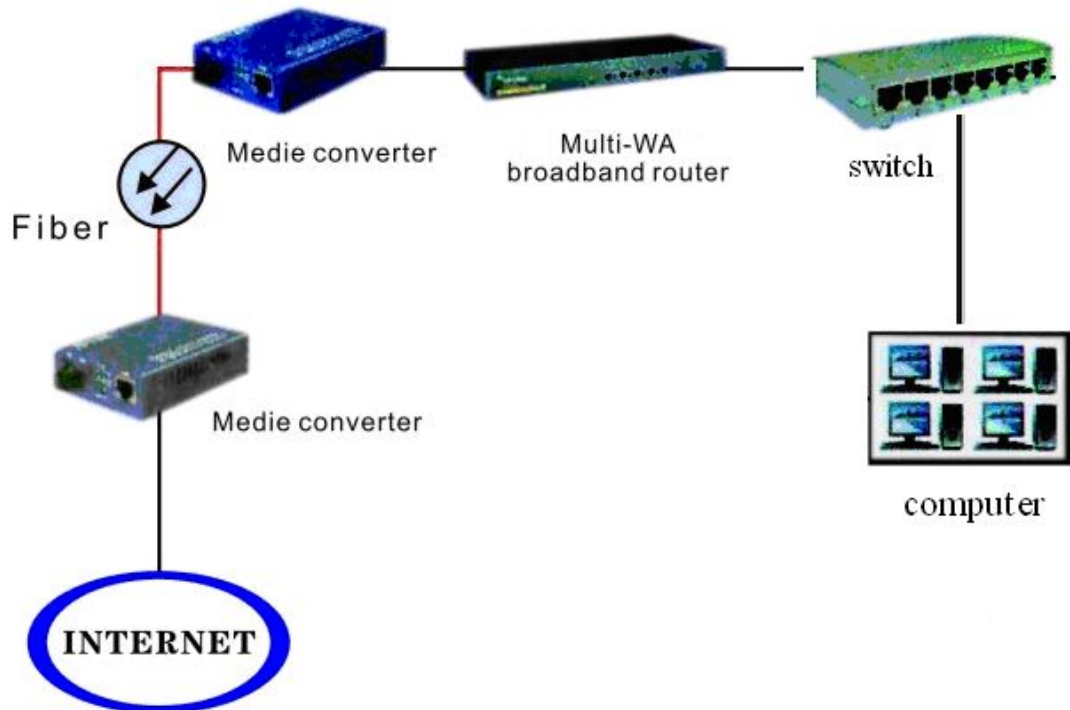

Contact

Shenzhen Sinovo Telecom Co. Ltd

Website: www.sinovocorp.com Email: sales@sinovocorp.com

Tel: +86(0)0755-3295 9919 Fax: +86(0)755 3295 9918

Factory ADD: 5/F Chuang Park, Taoyuan Street, Baoan District, Shenzhen, China 518000

Head Quarter: 11/F, Taibang Technology Building, Gaoxin South 4th, Science and Technology Park South, Nanshan, Shenzhen, China 518040