



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

● Features :

- GiSObit Ethernet
- GiSObit Fiber Channel
- 1310nm FP laser and PIN photodetector for 2KM,10KM and DFB laser for 40KM transmission
- 1550nm uncooled DFB laser and pin photodetector for 40KM and 80KM
- SFP MSA package with duplex LC connector
- +3.3V single power supply
- Power consumption less than 1W
- Operating case temp
Standard temp: 0~+70°C
Industrial temp:-40~+85°C
- Compliant withRoHS

● Absolute Maximum Ratings

Table 1- Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Supply Voltage	Vcc ₃	-0.5	-	+3.6	V	
Storage Temperature	T _s	-40	-	85	℃	
Operating Humidity	RH	+5	-	+95	%	

● Recommended Operating Conditions

Table 2- Recommended operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating	Standard	T _C	0	-	+70	℃
Case Temperature	Industrial		-40	-	+85	℃
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc	-	-	300	mA	
Power Dissipation	Pd	-	-	1	W	



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

Data Rate		-	1250	-	Mbps	
-----------	--	---	------	---	------	--

● Electrical Characteristics

Table 3- Electrical Characteristics

Parameter	Symbol	Unit	Min.	Typ.	Max.	Notes
Electrical Characteristics						
Supply Current	I _{CC}	mA	-	-	300	
Differential Data Input Swing		mV	200	-	2400	1
Differential Data Output Swing		mV	600	-	1200	2
Differential Data input impedance		Ω	-	100	-	1
Signal Level(LVTTL H)		V	2.4	-	V _{CC}	
Signal Level(LVTTL L)		V	0	-	0.8	

Note:

1. Internally AC coupled, input termination may be required for CML or LVPECL applications.
2. Internally AC coupled, CML differential output stage.

● Optical Characteristics

Table 4-Optical Characteristics

SOSP-8512-05D (850nm VCSEL and PIN,550M,NO DDMI)

SOSP-8512-05D (850nm VCSEL and PIN,550M, DDMI)

Parameter	Symbol	Unit	Min.	Typ.	Max.	Notes
Optical transmitter Characteristics						
Data Rate		Mbps	-	1250	-	
Center Wavelength Range	λ _C	nm	830	850	870	
Launch Optical Power	P ₀	dBm	-9.5	-	-4	1
Extinction Ratio	ER	dB	9	-	-	
Jitter Generation(pK-pK)		UI	-	-	0.1	
Jitter Generation(RMS)		UI	-	-	0.01	
Eye Diagram	Compliant with IEEE802.3ah					
Optical receive Characteristics						
Data Rate		Mbps	-	1250	-	
Receiver Sensitivity		dBm	-	-	-17	



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

Overload Input Optical Power		P_{IN}	dBm	0	-	-	
Center Wavelength Range		λ_c	nm	830	850	870	
LOS	LOS_A		dBm	-28	-	-	
	LOS_D			-	-	-18	
LOS Hysteresis			dB	0.5	-	-	

Note:

1. Coupled into 9/125 SMF.

Table 5-Optical Characteristics

SOSP-3112-02 (1310nm FP and PIN,2KM,NO DDMI)

SOSP-3112-02D (1310nm FP and PIN,2KM, DDMI)

SOSP-3112-10 (1310nm FP and PIN,10KM,NO DDMI)

SOSP-3112-10D (1310nm FP and PIN,10KM, DDMI)

Parameter	Symbol	Unit	Min.	Typ.	Max.	Notes
Optical transmitter Characteristics						
Data Rate		Mbps	-	1250	-	
Center Wavelength Range	λ_C	nm	1290	1310	1330	
Spectral Width(@-20dB)	$\Delta\lambda$	nm	-	-	7.7	
Launch Optical Power	P_0	dBm	-9.5	-	-3	1
Extinction Ratio	ER	dB	9	-	-	
Jitter Generation(pK-pK)		UI	-	-	0.1	
Jitter Generation(RMS)		UI	-	-	0.01	
Eye Diagram	Compliant with IEEE802.3ah					
Optical receive Characteristics						
Data Rate		Mbps	-	1250	-	
Receiver Sensitivity		dBm	-	-	-20	
Overload Input Optical Power	P_{IN}	dBm	-3	-	-	
Center Wavelength Range	λ_c	nm	1290	1310	1330	
LOS	LOS_A		dBm	-31	-	-
	LOS_D			-	-	-21
LOS Hysteresis		dB	0.5	-	-	

Note:

1. Coupled into 9/125 SMF.



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

Table 6-Optical Characteristics

SOSP-3112-40 (1310nm DFB and PIN,40KM,NO DDMI)

SOSP-3112-40D (1310nm DFB and PIN,40KM, DDMI)

Parameter	Symbol	Unit	Min.	Typ.	Max.	Notes
Optical transmitter Characteristics						
Data Rate		Mbps	-	1250	-	
Center Wavelength Range	λ_C	nm	1290	1310-	1330	
Spectral Width(@-20dB)	$\Delta\lambda$	nm	-	-	7.7	
Launch Optical Power	P_0	dBm	-5	-	0	1
Extinction Ratio	ER	dB	9	-	-	
Jitter Generation(pK-pK)		UI	-	-	0.1	
Jitter Generation(RMS)		UI	-	-	0.01	
Eye Diagram	Compliant with IEEE802.3ah					
Optical receive Characteristics						
Data Rate		Mbps	-	1250	-	
Receiver Sensitivity		dBm	-	-	-23	
Overload Input Optical Power	P_{IN}	dBm	-3	-	-	
Center Wavelength Range	λ_c	nm	1290	1310	1330	
LOS	LOS_A	dBm	-34	-	-	
	LOS_D		-	-	-24	
LOS Hysteresis		dB	0.5	-	-	

Note:

1. Coupled into 9/125 SMF.

Table 7-Optical Characteristics

SOSP-5512-40 (1550nm DFB and PIN,40KM,NO DDMI)

SOCS-5512-40D (1550nm DFB and PIN,40KM, DDMI)

Parameter	Symbol	Unit	Min.	Typ.	Max.	Notes
Optical transmitter Characteristics						
Data Rate		Mbps	-	1250	-	
Center Wavelength Range	λ_C	nm	1530	1550-	1570	
Launch Optical Power	P_0	dBm	-5	-	0	1
Extinction Ratio	ER	dB	9	-	-	
Jitter Generation(pK-pK)		UI	-	-	0.1	
Jitter Generation(RMS)		UI	-	-	0.01	



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

Eye Diagram		Compliant with IEEE802.3ah				
Optical receive Characteristics						
Data Rate			Mbps	-	1250	-
Receiver Sensitivity			dBm	-	-	-24
Overload Input Optical Power		P_{IN}	dBm	-3	-	-
Center Wavelength Range		λ_c	nm	1530	1550	1570
LOS	LOS_A		dBm	-35	-	-
	LOS_D			-	-	-25
LOS Hysteresis			dB	0.5	-	-

Note:

1. Coupled into 9/125 SMF.

Table 8-Optical Characteristics

SOSP-5512-80 (1550nm DFB and PIN,80KM,NO DDMI)

SOSP-5512-80D (1550nm DFB and PIN,80KM, DDMI)

Parameter	Symbol	Unit	Min.	Typ.	Max.	Notes
Optical transmitter Characteristics						
Data Rate		Mbps	-	1250	-	
Center Wavelength Range	λ_C	nm	1530	1550	1570	
Launch Optical Power	P_0	dBm	0	-	5	1
Extinction Ratio	ER	dB	9	-	-	
Jitter Generation(pK-pK)		UI	-	-	0.1	
Jitter Generation(RMS)		UI	-	-	0.01	
Eye Diagram	Compliant with IEEE802.3ah					
Optical receive Characteristics						
Data Rate		Mbps	-	1250	-	
Receiver Sensitivity		dBm	-	-	-23	
Overload Input Optical Power	P_{IN}	dBm	-3	-	-	
Center Wavelength Range	λ_c	nm	1530	1550	1570	
LOS	LOS_A		dBm	-34	-	-
	LOS_D			-	-	-24
LOS Hysteresis		dB	0.5	-	-	

Note:

1. Coupled into 9/125 SMF.

● Recommended Interface Circuit

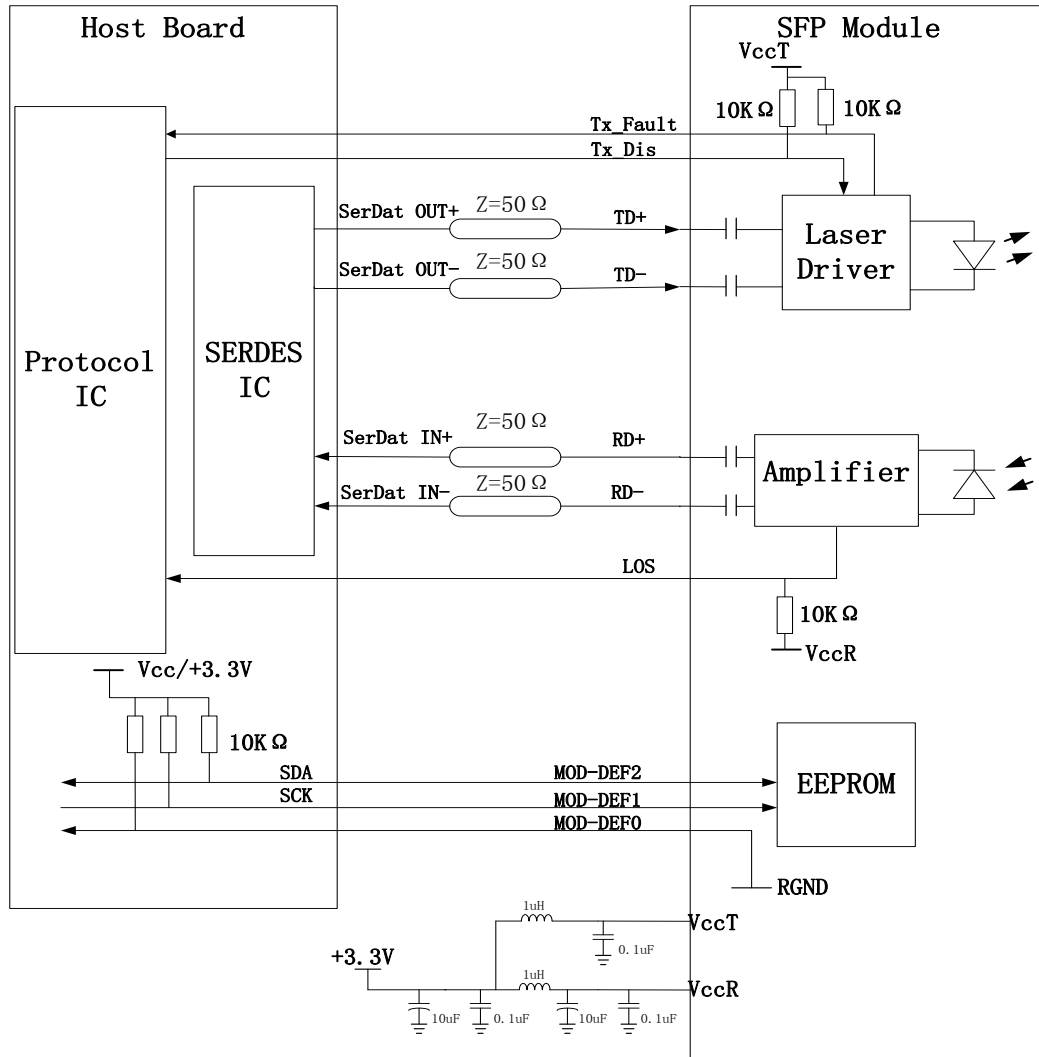


Figure 1, Recommended Interface Circuit



● Recommended Host Board Power Supply Circuit

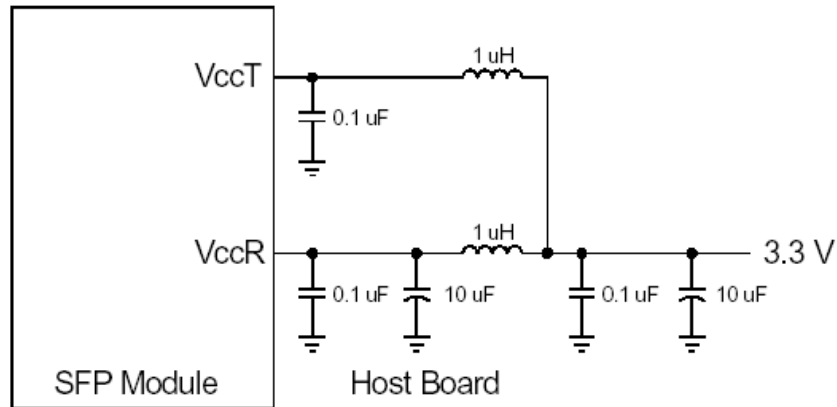


Figure 2, Recommended Host Board Power Supply Circuit

● Pin arrangement

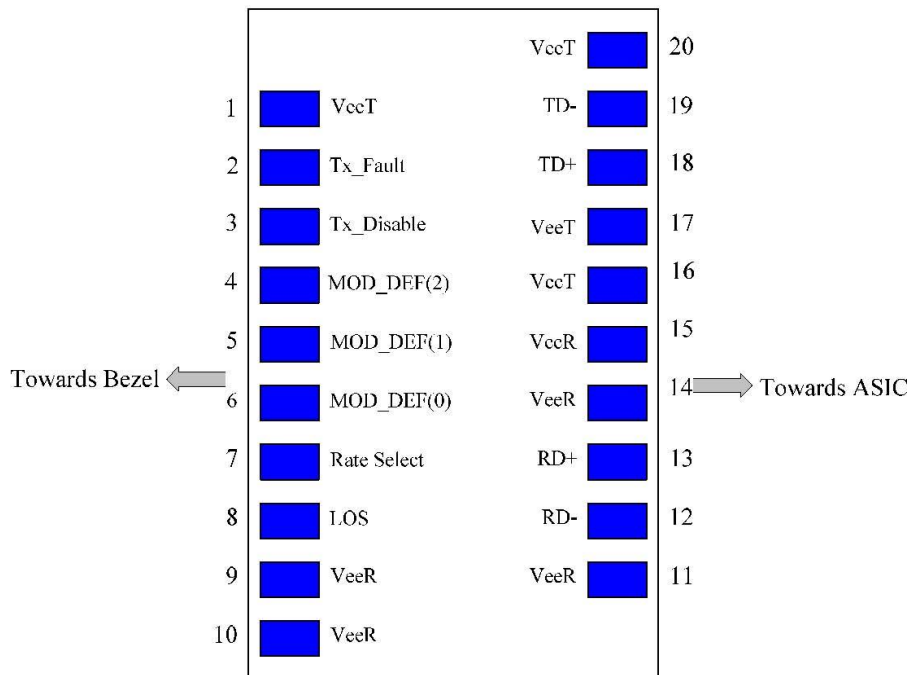


Figure 3, Pin View



Table 9-Pin Function Definitions

Pin	Name	FUNCTION	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2, Module disables on high or open
4	MOD-DEF2	Module Definition 2	3	Note 3, Data line for Serial ID.
5	MOD-DEF1	Module Definition 1	3	Note 3, Clock line for Serial ID.
6	MOD-DEF0	Module Definition 0	3	Note 3, Grounded within the module.
7	Rate Select	Not Connect	3	Function not available
8	LOS	Loss of Signal	3	Note 4
9	VeeR	Receiver Ground	1	Note 5
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD-	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3 ± 5%,
16	VccT	Transmitter Power	2	3.3 ± 5%
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	Note 5

Note:

- TX Fault is open collector output which should be pulled up externally with a 4.7K ~10KΩ resistor on the host board to voltage between 2.0V and V_{CC}+0.3V. Logic 0 indicates normal operation; logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- TX Disable input is used to shut down the laser output per the state table below. It is pulled up within the module with a 4.7~ 10K resistor.

Low (0- 0.8V):	Transmitter on
Between (0.8V and 2V):	Undefined
High (2.0 – VccT):	Transmitter Disabled
- MOD-DEF 0, 1, 2. These are the module definition pins. They should be pulled up with a 4.7~10K resistor on the host board to supply less than VccT+0.3V or VccR+0.3V. MOD-DEF 0 is grounded by the module to indicate that the module is present.



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

MOD-DEF 1 is clock line of two wire serial interface for optional serial ID.

MOD-DEF 2 is data line of two wire serial interface for optional serial ID.

4. LOS (Loss of signal) is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; logic 1 indicates loss of signal. In the low state, the output will be pulled to less than 0.8V.
5. These are the differential receiver outputs. They are AC-coupled 100Ω differential lines which should be terminated with 100Ω differential at the user SERDES. The AC coupling is done inside the module and thus not required on the host board.
6. These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module.

● Digital Diagnostic Memory Map

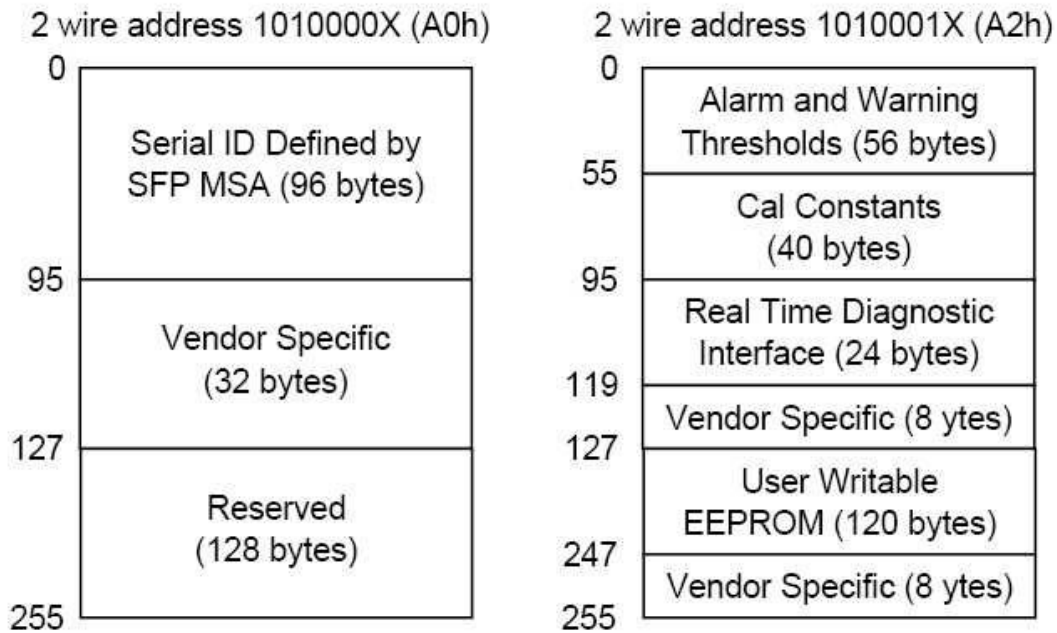


Figure 4, memory map



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

● Mechanical Diagram

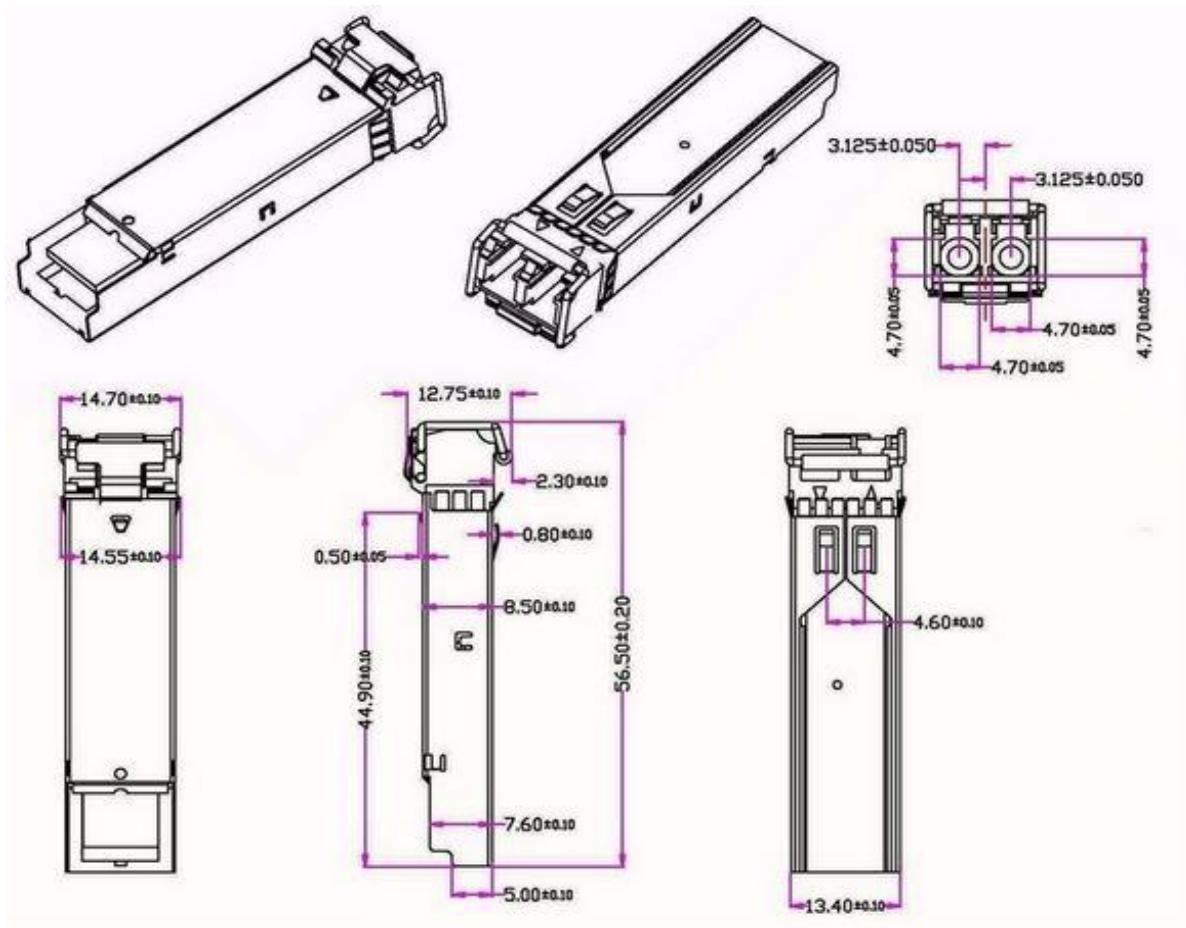


Figure 5, mechanical diagram

● Order Information

Table10-order information

Part Number	Product Description
SOSP-3112-02	SFP 1310nm,1.25G, 2KM, NO DDM ,0°C~70°C
SOSP-3112-02I	SFP 1310nm,1.25G, 2KM, NO DDM ,-40°C~85°C
SOSP-3112-02D	SFP 1310nm,1.25G, 2KM, DDM ,0°C~70°C
SOSP-3112-02ID	SFP 1310nm,1.25G, 2KM, DDM ,-40°C~85°C
SOSP-3112-10	SFP 1310nm,1.25G, 10KM, NO DDM ,0°C~70°C
SOSP-3112-10I	SFP 1310nm,1.25G, 10KM, NO DDM ,-40°C~85°C



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

SOSP-3112-20D	SFP 1310nm,1.25G, 20KM, DDM ,0℃~70℃
SOCS-3112-20ID	SFP 1310nm,1.25G, 20KM, DDM , -40℃~85℃
SOCS-3112-40	SFP 1310nm,1.25G, 40KM, NO DDM ,0℃~70℃
SOCS-3112-40I	SFP 1310nm,1.25G, 40KM, NO DDM , -40℃~85℃
SOCS-3112-40D	SFP 1310nm,1.25G, 40KM, DDM ,0℃~70℃
SOCS-5112-40ID	SFP 1310nm,1.25G, 40KM, DDM , -40℃~85℃
SOSP-5112-40	SFP 1550nm,1.25G, 40KM, NO DDM ,0℃~70℃
SOSP-5112-40I	SFP 1550nm,1.25G, 40KM, NO DDM , -40℃~85℃
SOSP-5112-40D	SFP 1550nm,1.25G, 40KM, DDM ,0℃~70℃
SOSP-5112-40ID	SFP 1550nm,1.25G, 40KM, DDM , -40℃~85℃
SOSP-5112-80	SFP 1550nm,1.25G, 80KM, NO DDM ,0℃~70℃
SOSP-5112-80I	SFP 1550nm,1.25G, 80KM, NO DDM , -40℃~85℃
SOSP-5112-80D	SFP 1550nm,1.25G, 80KM, DDM ,0℃~70℃
SOSP-5112-80ID	SFP 1550nm,1.25G, 80KM, DDM , -40℃~85℃
SOSP-8512-02	SFP 850nm,1.25G, 550M, NO DDM ,0℃~70℃
SOSP-8512-02D	SFP 850nm,1.25G, 550M, DDM ,0℃~70℃

- Notice

SINOVO reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. SINOVO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

- Contact

Shenzhen Sinovo Telecom Co.,Ltd

Tel:+86(0)0755-32959919 Fax:+86(0)755 32959918

Email: sales@sinovocorp.com

Web:www.sinovocorp.com

Factory: 5/F,University Chuangye Park,Taoyuan Street,Xi Li Town, Nanshan

SFP 1.25G Transceiver



SOSP-8512-05D

SOSP-3112-20D/40D SOSP-5112-40D/80D

District, Shenzhen, Guangdong